




BAJRANG
ENGINEERS

AODD SERIES : Air Operating Diaphragm Pump



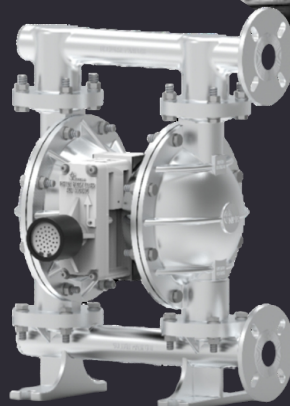

BVGP SERIES




SPECIFICATION :

Capacity	Up to 55 M3/hr.
Head	Up to 70 Mtr.
Discharge	12 mm to 80 mm
Temperature	Up to 120°C
Air Inlet Size	1/4" to 1/2"
Pressure	Up to 7 kg/cm ²
M.O.C	PP, PVDF, Aluminium & SS 316

APPLICATION :

- ✓ Solvents
- ✓ Acids
- ✓ Caustics
- ✓ High Viscous Liquids
- ✓ Abrasive Media
- ✓ Hazardous & Flammable Liquids
- ✓ Barrel Loading - Unloading
- ✓ Filter Press & Transfer
- ✓ Slurry Transfer

DESIGN FEATURES :

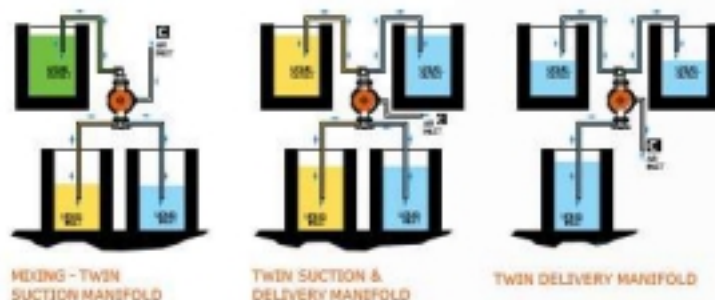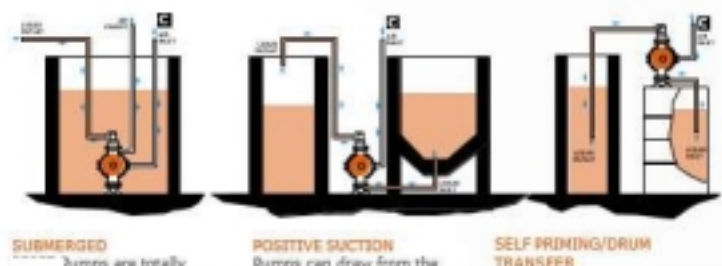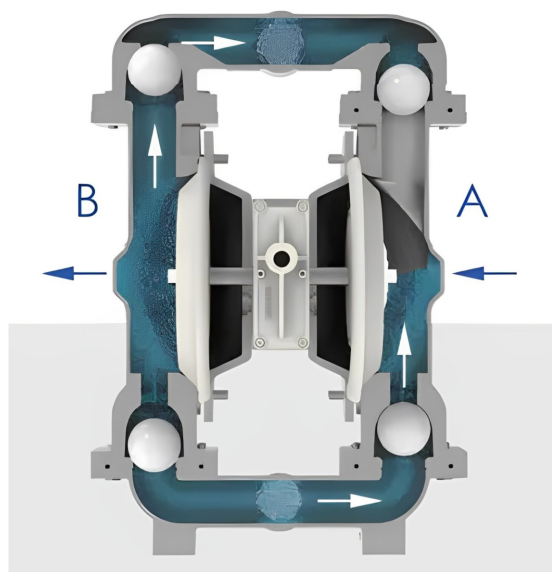

AODD SERIES : Air Operating Diaphragm Pump

AODD SERIES pump are light weight, easy to installation and operating by air pressure, available in **MOC PP, PVDF, PTFE, SS, ALUMINIUM**. This pump used for abrasive slurry handling.

About Us :

We are Leading manufacturers of Diaphragm pumps and its accessories.

Our objective is to provide excellent quality equipment with innovative solutions to fulfill the specific requirements of our customers. We have a sales team who is experienced and skilled in educating our customers about our products.

AOD - 150



Specifications:

Height:	230 mm
Width:	236 mm
Depth:	277 mm
Air Inlet:	1/4" BSP
Inlet:	1/2"
Outlet:	1/2"

Wetted Material:	Polypropylene, PVDF ETFE
-------------------------	-----------------------------

Elastomers:	Teflon Santoprene
Performance:	30 LPM
Max. Flow Rate:	2.00 mm
Max. Size Solids:	Dry: 1.45 mtr
Suction Lift:	Wet: 2.83 mtr

AOD - 300



Specifications:

Height:	387 mm
Width:	340 mm
Depth:	319 mm
Air Inlet:	3/8" BSP
Inlet:	1"
Outlet:	1"

Wetted Material:	Polypropylene, PVDF, ETFE
-------------------------	------------------------------

Elastomers:	Teflon Santoprene
Performance:	95 LPM
Max. Flow Rate:	3.17 mm
Max. Size Solids:	Dry: 3.05 mtr
Suction Lift:	Wet: 4.89 mtr

AOD - 400



Specifications:

Height:	671 mm
Width:	484 mm
Depth:	369 mm
Air Inlet:	1/2"
Inlet:	1 1/2"
Outlet:	1 1/2"

Wetted Material:	Polypropylene
-------------------------	---------------

Elastomers:	Teflon Santopren Neoprene Polyureth
--------------------	---

Performance:	210 LPM
Max. Flow Rate:	4.76 mm
Max. Size Solids:	Dry: 3.05 Mtr
Suction Lift:	Wet: 6.09 Mtr

AOD - 500




Specifications:

Height:	855 mm
Width:	615 mm
Depth:	410 mm
Air Inlet:	1/2" BSP
Inlet:	2"
Outlet:	2"

Wetted Material:	Polypropylene, PVDF ETFE
-------------------------	-----------------------------

Elastomers:	Teflon Santoprene Neoprene Polyurethane
--------------------	---

Performance:	450 LPM
Max. Flow Rate:	6.35 mm
Max. Size Solids:	Dry: 6.23 mtr
Suction Lift:	Wet: 8.65 mtr

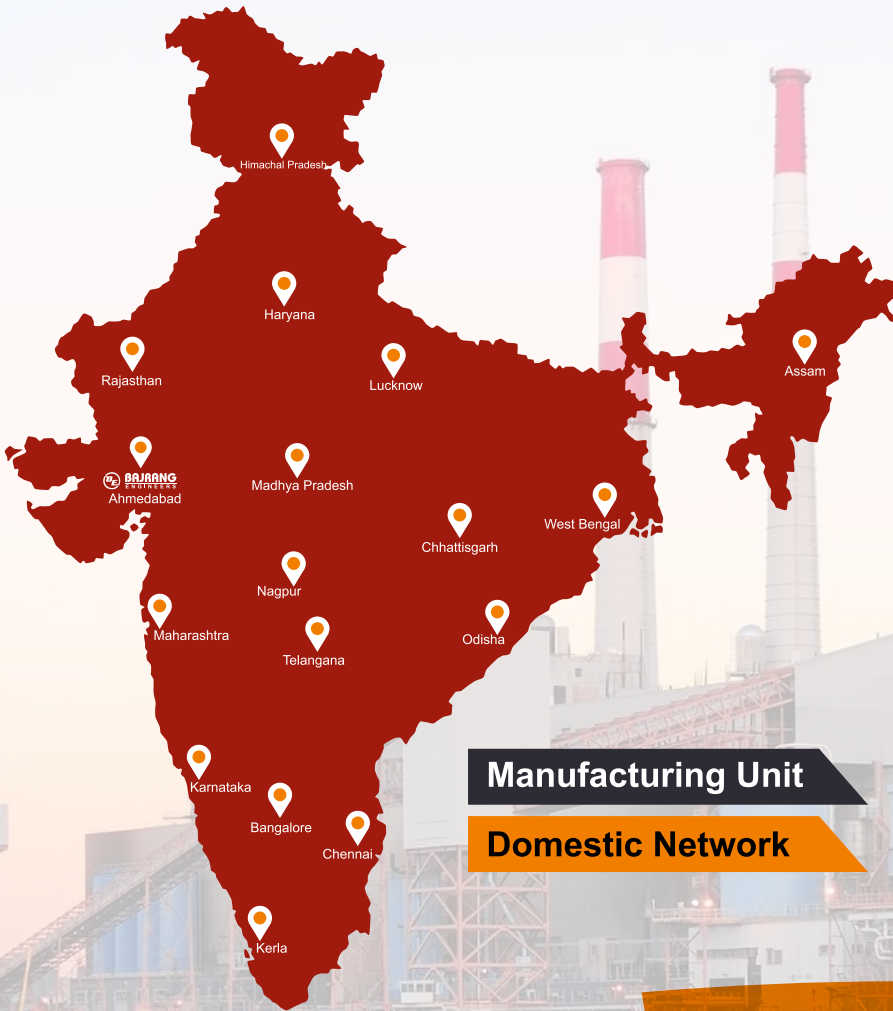

Manufacturing Unit

Domestic Network



ADDRESS :

📍 Shed No. 25, Shiv Industrial Estate,
B/H Vepari Mahamandal, Singarva,
Ahmedabad, Gujarat - 382430.

☎ + 91 88492 47727 / +91 76009 91355

@ bajrangeng99@gmail.com

🌐 www.bajrangpumps.com

Main Brochure
QR CODE

