





BAJRANG
ENGINEERS

BXP SERIES : POLYPROPYLENE PUMPS

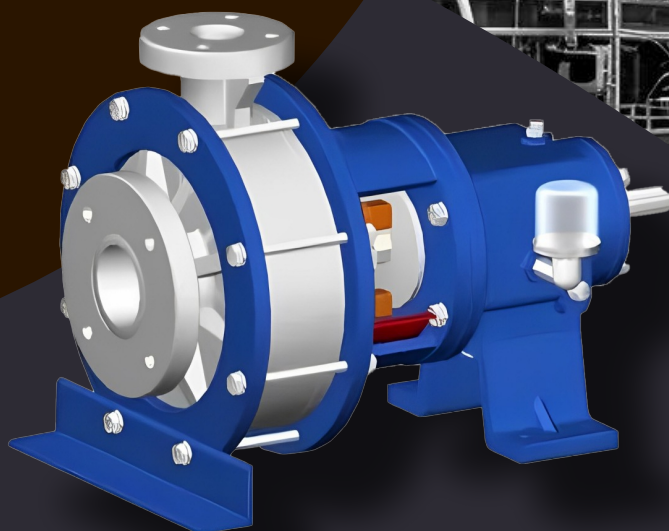

BXP SERIES

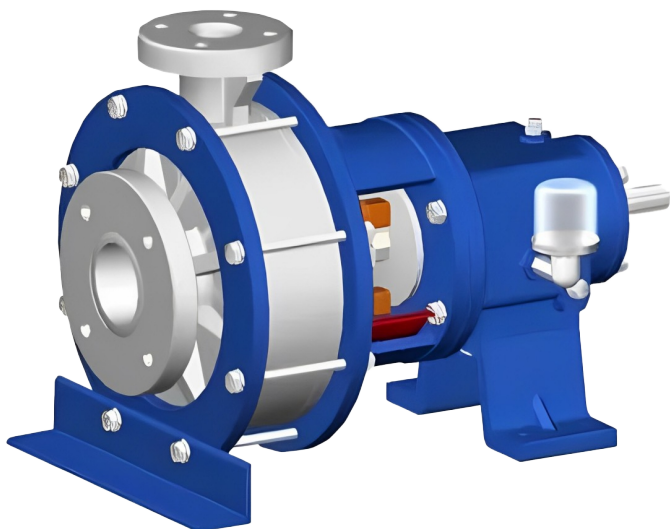






SPECIFICATION :

Capacity	Up to 40 M3/hr.
Head	Up to 48 Mtr.
Discharge	25 mm to 50 mm
Temperature	Up to 350°C
Speed	Up to 3500 rpm
Pressure	Up to 4.8 kg/cm ²
M.O.C	C.I., C.S., SS-304/304L, SS-316/316, Bronze Alloy-20, CD4MCU Hast alloy B&C, etc.

APPLICATION :

- ✓ Transferring of Concentrated HCL From Road Tankers
- ✓ Filter Press for Dyes & Chemical
- ✓ Effluent Treatment
- ✓ Water Treatment Plants
- ✓ Pickling in Steel Rolling Mills
- ✓ Scrubbing of Corrosive Gases Like
- ✓ Cl, Br, F, So, So, Co, NH .. Electro-Plating
- ✓ Descaling

DESIGN FEATURES :

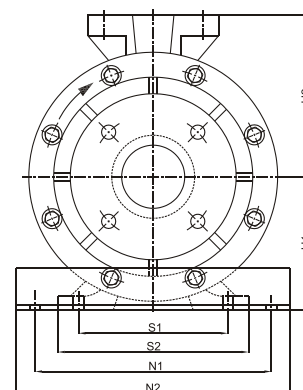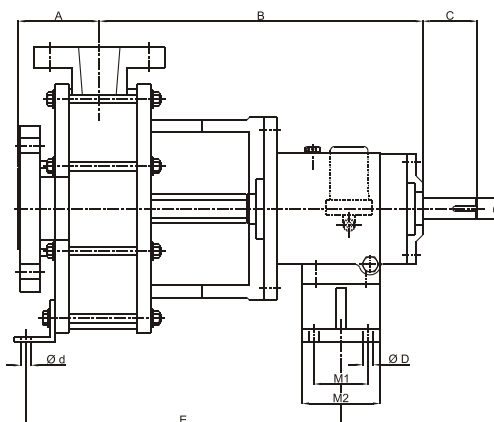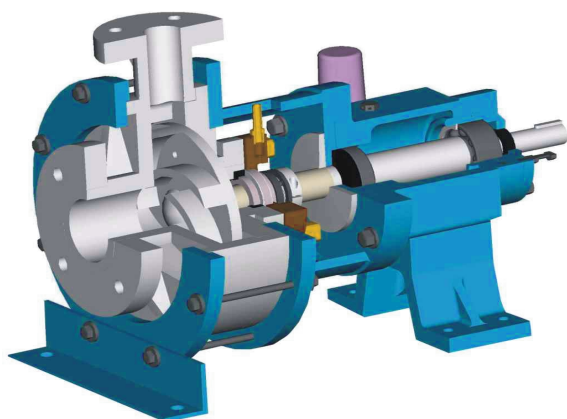



BXP SERIES : POLYPROPYLENE PUMPS


EXCELLENT OF HANDLING CORROSIVE CHEMICALS SEMI
OPEN IMPELLER & CERAMIC SLEEVE.

PERFORMANCE CHART

SERIES	MODEL	SUCTION (MM)	DELIVERY (MM)	HP	RPM	HEAD (MWC) v/s CAPACITY (M3/HR)					
BE	BE - 100	25	25	1	2900	12/00	11/02	08/04	07/06	05/08	03/09
	BE - 120	40	40	2	2900	14/00	12/03	10/06	08/09	06/12	04/15
	BE - 130	40	40	3	2900	25/00	22/06	20/09	17/12	15/15	12/18
BXP	BXP - 50R	40	40	2	1400	12/00	11/06	10/10	09/16	08/22	07/24
	BXP - 50	75	40	3	1400	15/00	13/10	12/15	11/23	10/28	09/30
	BXP - 55	75	50	5	1400	16/00	14/20	12/30	10/36	09/42	08/44
	BXP - 160R	40	40	3	2900	22/00	20/03	18/08	15/12	14/16	10/25
	BXP - 160	75	40	5	2900	31/00	26/12	21/15	20/25	18/30	12/38
	BXP - 170	75	50	7.5	2900	35/00	30/15	28/24	26/32	20/38	14/50
	BXP - 40	40	40	12.5	2900	51/00	45/14	40/20	35/25	30/40	24/48

PERFORMANCE RANGE CHART

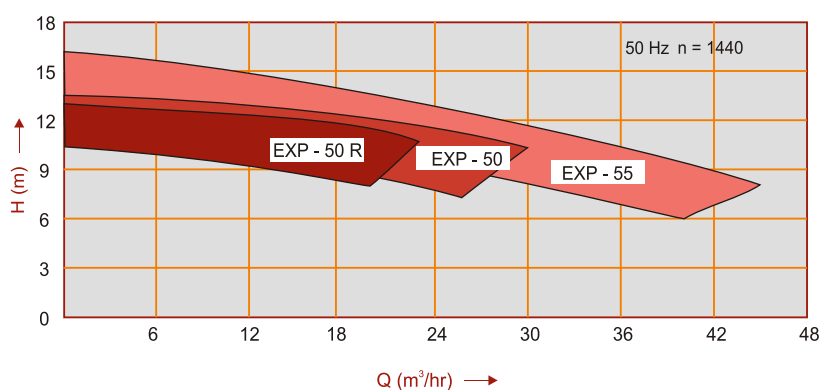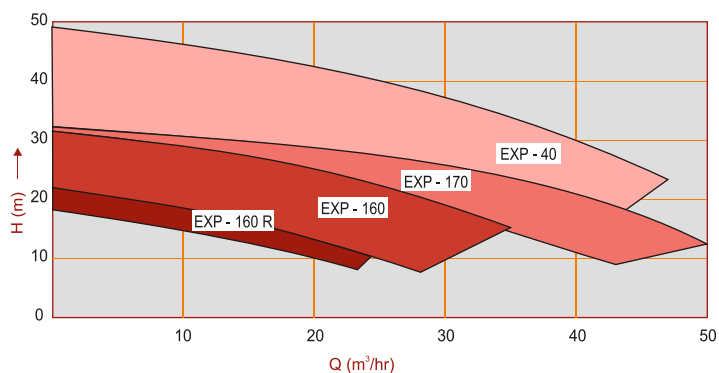

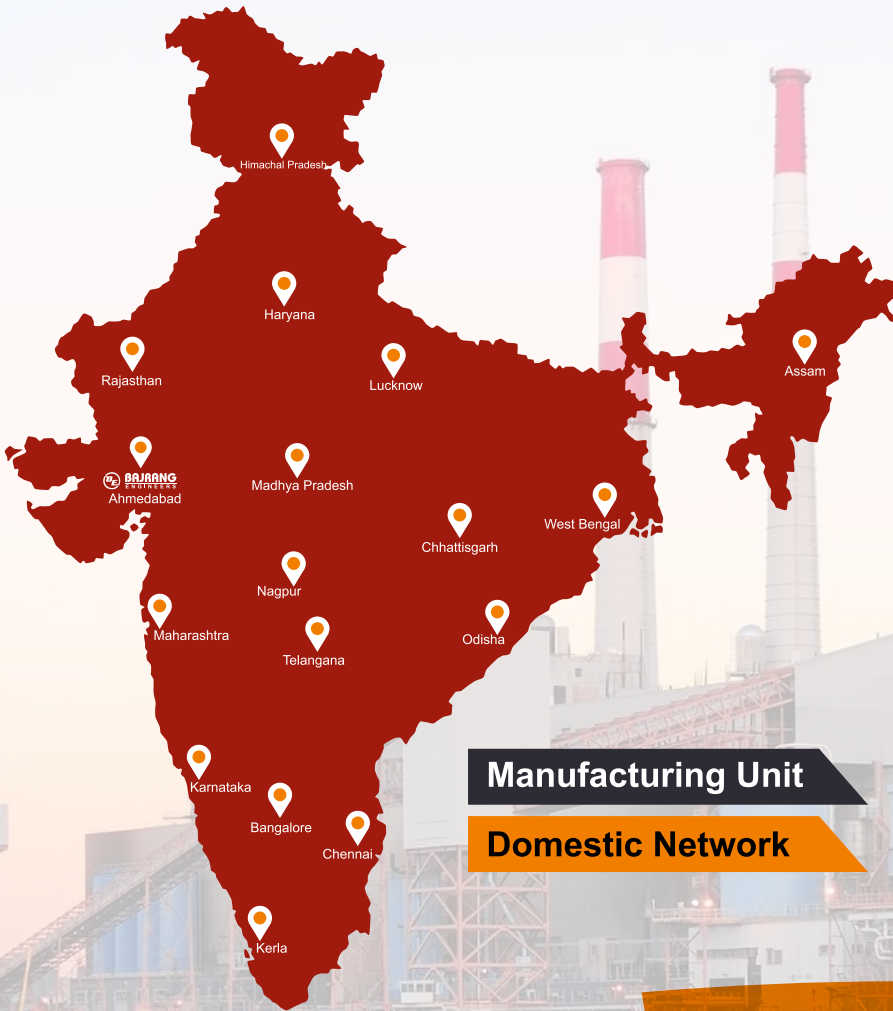

Manufacturing Unit

Domestic Network



ADDRESS :

📍 Shed No. 25, Shiv Industrial Estate,
B/H Vepari Mahamandal, Singarva,
Ahmedabad, Gujarat - 382430.

☎ + 91 88492 47727 / +91 76009 91355

✉ bajrangeng99@gmail.com

🌐 www.bajrangpumps.com

Main Brochure
QR CODE

